

LED Luminaire

Solid state technology
delivering outstanding light
quality and stability.



GL-6525

CIRCLE FEATURES


- ◆ 5 Year Limited Warranty
- ◆ Can be customized with logos, numbers or letters
- ◆ Available in Satin Aluminum and all G Lighting standard powder coat finishes
- ◆ Compatible with occupancy sensors for LEED projects
- ◆ Sustainable: Field replaceable LED system—Can be upgraded

CIRCLE
CIRCLE

CIRCLE

Accent Interior LED Marker

G Lighting
 9777 Reavis Park Drive
 St. Louis, MO 63123
 800-331-2425 or 314-631-6000
 Fax 314-631-7800
sales@glighting.com www.glighting.com

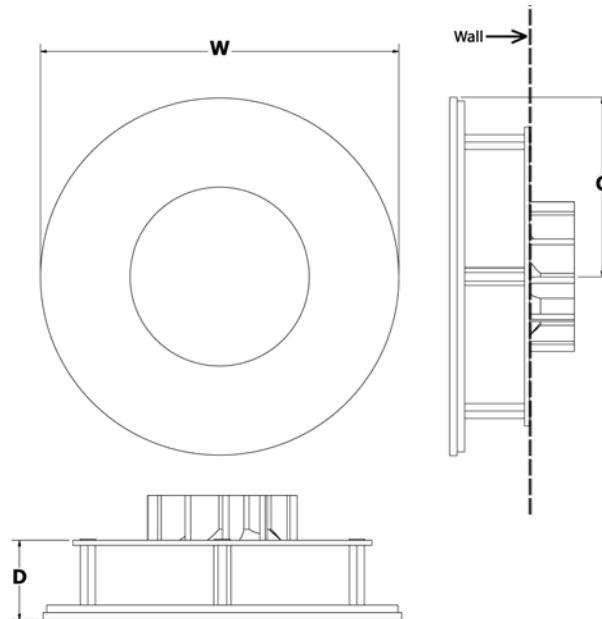

CATALOG NUMBER AS SHOWN ON FRONT—HOW TO SPECIFY:			
MODEL NO.	SUPPLY VOLTAGE AC	ACRYLIC LENS	FRAME FINISH
GL-6525-	1-	S-	P
BUILD YOUR SPEC:			
GL-6525 W 6" 152 mm H 6" 152 mm D 1-5/16" 33 mm C 3" 76 mm	1 1- 4W LED 120V 2 1- 4W LED 277V	S Satin White D Dichroic	P Satin Aluminum See G Lighting Color chart for powder coat options.

LED

1- 4W* 3500K 85 CRI GE Vio™ high power violet based white LED—www.lumination.com/product.php?id=56

No ultra violet light

Less than 75K color shift and 70% lumen maintenance over 50,000 hour life.

Light source is field replaceable and can be upgraded.

RoHS compliant, mercury free

*Luminaire consumes 5W

DRIVER

Powered by 350mA driver

Polarized quick connect for ease of installation and replacement.

100% tested to ensure highest quality

Protection: Electronic internal, resettable short circuit protection. Thermal protection and overload regulation.

Listings: All components are UL recognized and drivers meet CE standards, Class 2 low voltage, inherently safe.

Consult factory for mounting details.

