

GL-6515

KYLE



# KYLE


## Interior LED Sconce

# GLighting

Since 1908

9777 Reavis Park Drive  
St. Louis, MO, 63123  
800.331.2425 or 314.631.6000  
Fax 314.631.7800

sales@glighting.com www.glighting.com

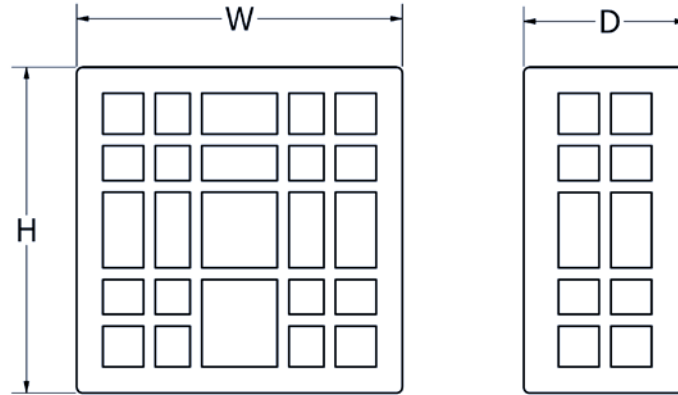

### GENERAL SPECIFICATION

**LED:** 4W 3500K 85CRI GE Vio™ high power violet based white LED.

Less than 75K color shift and 70% lumen maintenance over 50,000 hour life.

No ultra violet light.

RoHS compliant, mercury free.

**Listings:** All components are UL recognized and drivers meet CE standards. Class 2 low voltage, inherently safe, wet location.

**Driver:** Powered by 350mA driver.

Polarized quick connect for ease of installation and replacement.

Mounts in 2-1/8" deep 4-O junction box Steel City box no. 54171 or equivalent. ( Supplied by others)

Protection: Electronic internal, resettable short circuit protection. Thermal protection and overload regulation.

SAMPLE CATALOG NUMBER:			
MODEL NO.	A-	S-	NSN
GL-6515	LAMPING	ACRYLIC	FINISH
W in 7" mm 180 H in 7" mm 180 4lbs 2kg D in 3 1/2" mm 90	A. 4LED120V B. 4LED277V	Standard: S Satin White F Faux Alabaster M Earth Marble  Acrylic is UL-94 HB Flame class rated.	Standard: Powder Coat Premium: Specify code from G-Lighting color chart. Backplate is matte white powder coat.

All dimensions are nominal.

### Lamp Definition

Lamp	LED	VOLTAGE	CRI	Rated Life Hrs <sup>1</sup>	Kelvin
4LED120	4W LED	120	85	50000	3500
4LED277	4W LED	277	85	50000	3500

<sup>1</sup>Per GE LED Product Guide. Luminaire consumes 5W.

