



GL-2535

# NEW YORK




# NEW YORK

## Schoolhouse Pendant

**GLighting**  
Since 1908

9777 Reavis Park Drive  
St. Louis, MO, 63123  
800.331.2425 or 314.631.6000  
Fax 314.631.7800

sales@glighting.com www.glighting.com

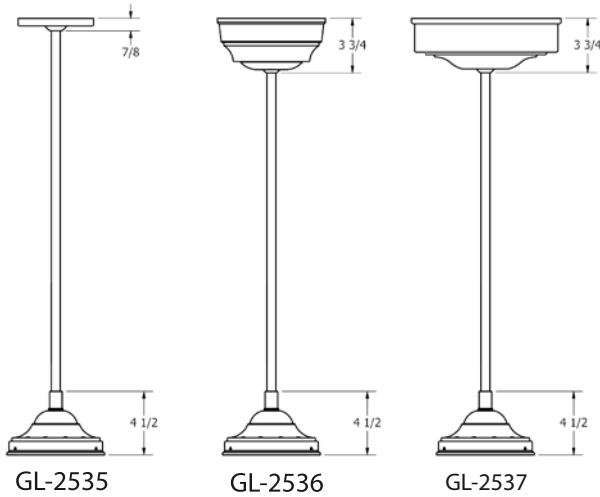

### GENERAL SPECIFICATION

**Canopy:** May be mounted on flat or sloped ceilings up to 40°.

**GU24:** Complies with Title 24. Fixture includes lamps. 120v only.


**Lamping:** Standard lamping packages offer long lamp life, high power factor energy efficient electronic ballast.

**Body:** 18ga steel or .050 aluminum glass fitter.

**Glass:** White opal diffuser hand blown in the USA.

**Modifications:** Consult factory for lamping or cluster options.

**Finish:** Highly durable oven cured no VOC premium powder coat.

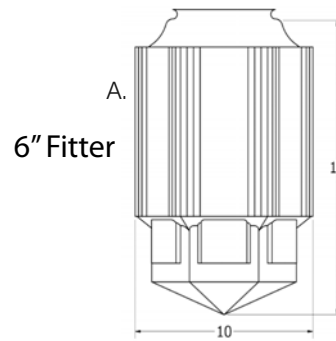

SAMPLE CATALOG NUMBER:					
MODEL NO.	LAMPING	GLASS	FINISH	OPTION(S)	OVERALL HEIGHT
GL-2535	A. 1GU26 B. 1GU32 C. 1GU42 D. 1GU25DIM GU - 120v only	6" Fitter: A. 10" x 16"	Standard: Powder Coat Specify code from G-Lighting color chart	A. No Options B. Damp Location Available in powder coat or Brushed Aluminum finish. D. Dimming See dimming chart.	Specify overall height in inches.
GL-2536	E. 1CFQ13 K. 2CFQ13 F. 1CFQ18 L. 2CFQ18 G. 1CFQ26 M. 2CFQ26 H. 1CFT26 N. 2CFT26 I. 1CFT32 O. 2CFT32 J. 1CFT42 P. 2CFT42		Premium: Specify code from G-Lighting color chart	E. Emergency Ballast Operates one fluorescent lamp. Remotely mounted. Specify voltage after code. Not compatible with GU24.	
GL-2537	Q. 3CFT26 T. 1MH50 R. 3CFT32 U. 1MH70 S. 3CFT42 V. 1MH100 Specify Voltage Q-S: 1 - 120v 2 - 277v				

All dimensions are nominal.

### Lamp Code Definition

Code	Fluorescent	Lamp Base	Incandescent Equivalent <sup>1</sup>	Rated Life Hrs <sup>1</sup>	Rated Lumens <sup>1</sup>	Kelvin	Code	Fluorescent	Lamp Base	Rated Life Hrs <sup>1</sup>	Rated Lumens <sup>1</sup>
GU26	GU24 26W	GU24	100W	10000	1650	2700	CFQ13	CFQ 13W	G24q-1	17000	755
GU32	GU24 32W	GU24	120W	10000	2200	2700	CFQ18	CFQ 18W	G24q-2	17000	970
GU42	GU24 42W	GU24	150W	10000	2730	2700	CFQ26	CFQ 26W	GX24q-3 4PIN	17000	1530
GU24	GU24 25W	GU24	100W	8000	1750	2700	CFT26	CFTR 26W	GX24q-3 4PIN	17000	1530
							CFT32	CFTR 32W	GX24q-3 4PIN	17000	2010
							CFT42	CFTR 42W	GX24q-4 4PIN	17000	2690
Code	Metal Halide	Lamp Base		Rated Life Hrs <sup>1</sup>	Rated Lumens <sup>1</sup>						
1MH50	BD-17 50W	Medium		10000	2000						
1MH70	BD-17 70W	Medium		12000	3300						
1MH100	BD-17 100W	Medium		15000	5900						

<sup>1</sup>Per MAXLIE & GE lamp products catalog. Contact factory for availability of other lamp configurations including LED.