



GL-2520

# PIONEER




# PIONEER

Indoor Pendant

G Lighting  
Since 1908

9777 Reavis Park Drive  
St. Louis, MO, 63123  
800.331.2425 or 314.631.6000  
Fax 314.631.7800

sales@glighting.com www.glighting.com

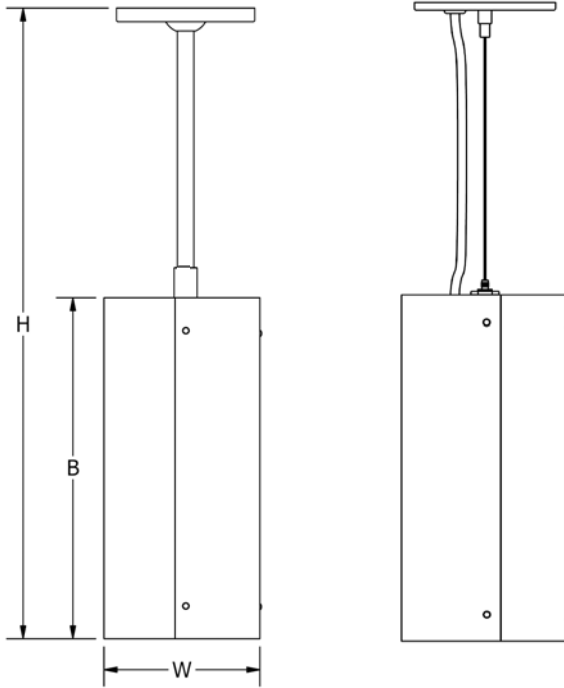

## GENERAL SPECIFICATION



**Canopy:** Low profile. May be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord hung.

**GU24:** Complies with Title 24. Fixture includes lamps. 120v only.

**Acrylic:** Acrylic is UL-94 HB Flame Class rated. Available with 3-Form.

**Modifications:** Also available in .080 brushed aluminum or painted bodies. Consult factory.

**Cable Hung:** Comes with 72" cable and cord for on-site adjustability.

SAMPLE CATALOG NUMBER: GL-2520-		A-	W-	NSN-	1-	024
MODEL NO.		LAMPING	ACRYLIC	FINISH	HANGER	OVERALL HEIGHT
GL-2520	W in 6 1/4" mm 160	A. 1GU13	Standard:	Standard:	1. Stem	Standard 24" overall height. Available up to 72".
	12lbs B in 13" mm 330	B. 1GU18	W White Opal	Powder Coat		
	5kg H in 24" mm 610	C. 1GU25DIM	SW Satin White			
		D. 1GU26	3-Form:	Premium:		For custom overall height, contact factory.
		E. 1GU32	3W Weave	SA Satin Aluminum		
		F. 1GU42	3G Grass			
			3L Leaf	Specify code from G-Lighting color chart.	2. Cable	
			Contact factory for 3-Form or .080 Aluminum			
			Acrylic is UL-94 HB Flame Class rated.			

\*Fixtures over 50 lbs require reinforced junction box  
All Dimensions are nominal.

## Lamp Code Definition

Code	Fluorescent	Lamp Base	Incandescent Equivalent <sup>1</sup>	Rated Life Hrs <sup>1</sup>	Lumens <sup>1</sup>	Kelvin
GU13	GU24 13W	GU24	60W	10000	900	2700
GU18	GU24 18W	GU24	75W	10000	1250	2700
GU25DIM <sup>2,3</sup>	GU24 25W	GU24	100W	8000	1750	2700
GU26	GU24 26W	GU24	100W	10000	1650	2700
GU32	GU24 32W	GU24	120W	10000	2200	2700
GU42	GU24 42W	GU24	150W	10000	2800	2700

<sup>1</sup>Per MAXLITE lamp products catalog.

<sup>2</sup>Continuous dimming down to 30%.

<sup>3</sup>Works with incandescent dimming controls.