

LED Luminaire

Solid state technology
delivering outstanding light
quality and stability.



GL-6510

SILHOUETTE FEATURES



- ◆ Compact design —ADA Compliant
- ◆ 5 Year Limited Warranty
- ◆ Available in all G Lighting standard powder coat finishes or custom painted finishes upon request to match building façade.
- ◆ Sustainable: Field replaceable LED system—Can be upgraded

SILHOUETTE
SILHOUETTE

SILHOUETTE

Accent Exterior LED ADA Wall Sconce

G Lighting
 9777 Reavis Park Drive
 St. Louis, MO 63123
 800-331-2425 or 314-631-6000
 Fax 314-631-7800
sales@glighting.com www.glighting.com

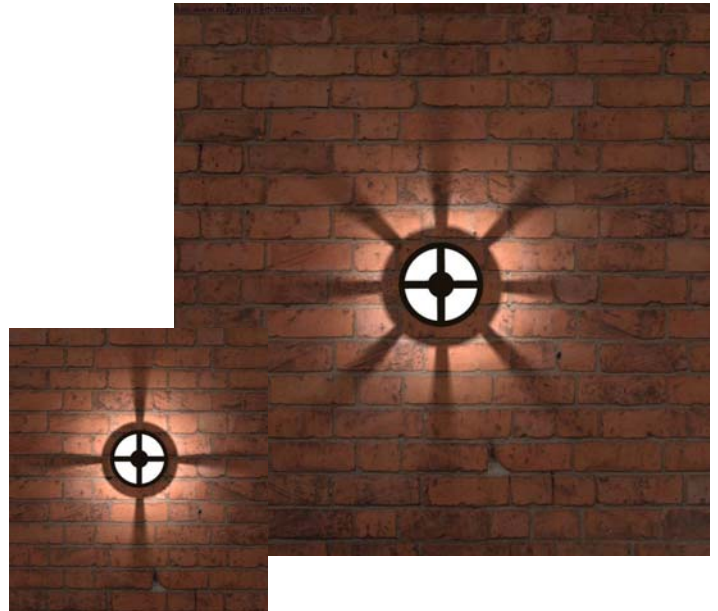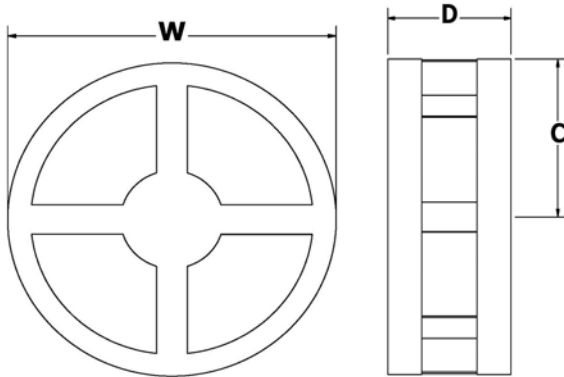

CATALOG NUMBER AS SHOWN ON FRONT—HOW TO SPECIFY:				
GL-6510-		1-	4-	TB
MODEL NO.	SUPPLY VOLTAGE AC	LIGHT PATTERN	FRAME FINISH	
BUILD YOUR SPEC:				
GL-6510 W 8" 203 mm H 8" 203 mm D 3-3/4" 95 mm C 4" 102 mm	1 1- 4W LED 120V 2 1- 4W LED 277V	4 4 WINDOWS 8 8 WINDOWS	TB Textured Black powder coat paint See G Lighting Color chart for more paint options.	

Standard Lens: White acrylic front with clear acrylic around the side.

LED

1- 4W* 3500K 85 CRI GE Vio™ high power violet based white LED—www.lumination.com/product.php?id=56

No ultra violet light

Less than 75K color shift and 70% lumen maintenance over 50,000 hour life.

Light source is field replaceable and can be upgraded.

RoHS compliant, mercury free

*Luminaire consumes 5W

DRIVER

Powered by 350mA driver

Polarized quick connect for ease of installation and replacement.

Mounts in 2-1/8" deep 4-O junction box
 Steel City® box no. 54171 or equivalent (supplied by others)

100% tested to ensure highest quality.

Protection: Electronic internal, resettable short circuit protection.
 Thermal protection and overload regulation.

Listings: All components are UL recognized and drivers meet CE standards, Class 2 low voltage, inherently safe, wet location.

