


GL-5005

TULA

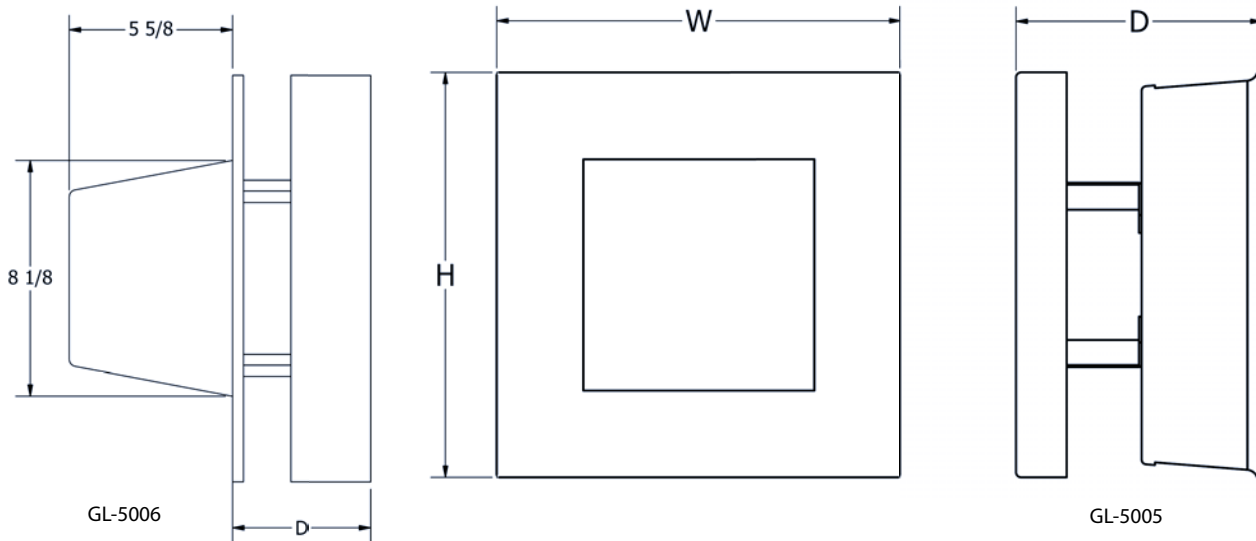

### GENERAL SPECIFICATION

**Body:** Formed and spun .50 aluminum.

**Acrylic:** UL-94 HB Flame Class rated.

**Standard Finishes:** Highly durable oven cured no VOC premium powder coat.

**Ballast:** Electronic Extreme Temperature metal halide ballast. Remote mounted with a -30°C rating.

SAMPLE CATALOG NUMBER: GL-5005-				
MODEL NO.	A- LAMPING	W- LENS	H- FINISH	A OPTION(S)
<b>GL-5005</b> W in 14" mm 360 H in 14" mm 360 10lbs 4.5kg D in 9" mm 230	A. 1CFTR26 B. 1CFTR32 C. 1MH70 D. 1MH100 E. 1MH150*	<b>Cast Resin:</b> A. Ice B. Grass C. Leaf D. Weave <b>Acrylic:</b> E. Satin White F. Hand Painted Alabaster  Acrylic is UL-94 HB Flame Class rated.	<b>Standard:</b> Powder Coat <b>Premium:</b> BA: Brushed Aluminum  Specify code from G-Lighting color chart.	A. No Options B. Ceiling Mount C. Emergency Remote mount up to 5' from lamps.
<b>GL-5006</b> W in 14" mm 360 H in 14" mm 360 10lbs 4.5kg D in 4 3/4" mm 120  Recessed housing available for rough-in installation. Contact factory for availability				

All dimensions are nominal. \*Wall Mount Only

### Lamp Definition

Lamp	Flourescent	Lamp Base	Rated Life Hrs <sup>1</sup>	Lumens <sup>1</sup>
CFTR26	CFTR 26W	GX24q-3 4-PIN	12000	1440
CFTR32	CFTR 32W	GX24q-3 4-PIN	12000	1850
<b>Metal Halide</b>				
MH70	MH 70W	PR MED BASE	15000	3300
MH100	MH 100W	PR MED BASE	15000	5900
MH150	MH 150W	PR MED BASE	15000	8300

<sup>1</sup>Per MAXLITE & GE lamp products catalog