



GL-2505

FRONTIER



FRONTIER



Indoor Pendant

GLighting

Since 1908

9777 Reavis Park Drive
St. Louis, MO, 63123
800.331.2425 or 314.631.6000
Fax 314.631.7800

sales@glighting.com www.glighting.com

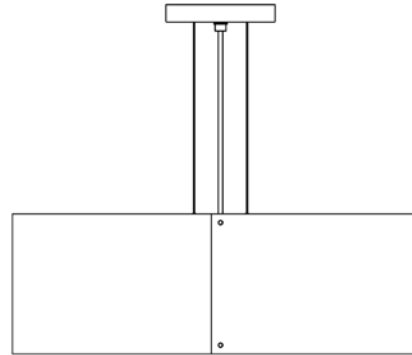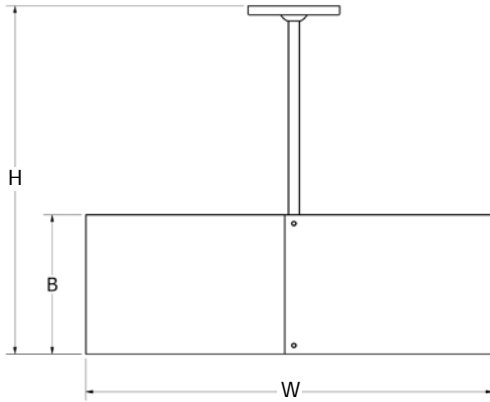

GENERAL SPECIFICATION

Canopy: Low profile. May be mounted on flat or sloped ceilings up to 40°.

Available stem or field adjustable cord hung.



GU24: Complies with Title 24. Fixture includes lamps. 120v only.

Lamping: Standard lamping packages offer long lamp life, high power factor energy efficient electronic ballast.

Acrylic: Acrylic is UL-94 HB Flame Class rated. Available with 3-Form.

Modifications: Also available in .080 brushed aluminum or painted bodies. Consult factory.

Cable Hung: Comes with 72" cable and cord for on-site adjustability.

SAMPLE CATALOG NUMBER:							
GL-2505-		A-	W-	NSN-	1-	A- 020	
MODEL NO.		LAMPING	ACRYLIC	FINISH	HANGER	VOLTAGE	OVERALL HEIGHT
GL-2505	W in 24" mm 610 18lbs B in 8" mm 205 7kg H in 20" mm 510	A. 3GU13* B. 3GU18* C. 3GU25DIM* D. 3GU26* E. 3GU32*	Standard: W White Opal SW Satin White 3-Form: 3W Weave	Standard: Powder Coat Optional: Metallic Finishes Specify code from G-Lighting color chart	1. Stem  2. Cable 	A. 120V B. 277V	Standard overall height shown by model no. For custom overall height, specify in inches.
GL-2506	W in 30" mm 760 20lbs B in 10" mm 255 7.9kg H in 22" mm 560	F. 3GU42* G. 4CFQ26 H. 4CFT26 I. 4CFT32 J. 4CFT42	3G Grass 3L Leaf Contact factory for 3-Form or .080 Aluminum Acrylic is UL-94 HB Flame Class rated.	Specify code from G-Lighting color chart.			

All Dimensions are nominal.
*Available in 120V only.

Lamp Code Definition

Code	Fluorescent	Lamp Base	Incandescent Equivalent ¹	Rated Life Hrs ¹	Rated Lumens ¹	Rated Kelvin	Code	Fluorescent	Lamp Base	Rated Life Hrs ¹	Rated Lumens ¹
GU13	GU24	13W GU24	60W	10000	900	2700	CFQ26	CFQ 26W	GX24q-3 4PIN	17000	1530
GU18	GU24	18W GU24	75W	10000	1250	2700	CFT26	CFTR 26W	GX24q-3 4PIN	17000	1530
GU25DIM ^{2,3}	GU24	25W GU24	100W	8000	1750	2700	CFT32	CFTR 32W	GX24q-3 4PIN	17000	2040
GU26	GU24	26W GU24	100W	10000	1650	2700	CFT42	CFTR 42W	GX24q-4 4PIN	17000	2690
GU32	GU24	32W GU24	120W	10000	2200	2700					
GU42	GU24	42W GU24	150W	10000	2800	2700					

¹Per MAXLITE lamp products catalog.

²Continuous dimming down to 30%. ³Works with incandescent dimming controls.