



New York LOW WATTAGE METAL HALIDE
G-30041-I2-D-T NOW AVAILABLE - SEE PAGE 3




Chicago
G-30042-A1-C-N

Moderne Pendants

9777 Reavis Park Drive • St. Louis, MO 63123
Toll Free: (800) 331-2425 • Phone: (314) 631-6000 • Fax: (314) 631-7800
Email: sales@glighting.com • Web: www.glighting.com



Pendant

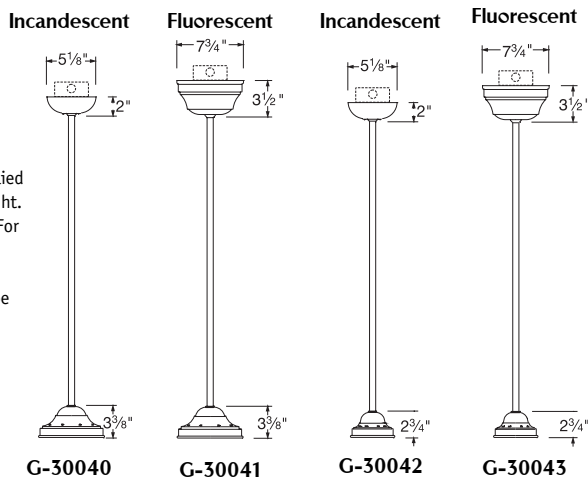


Pendants are supplied as 36" overall height. Consult Price List for Special Lengths. Pendants can be mounted on a slope up to 40°.


6" Fitter

4" Fitter

Chicago
4" Fitter
C




Flush Mount

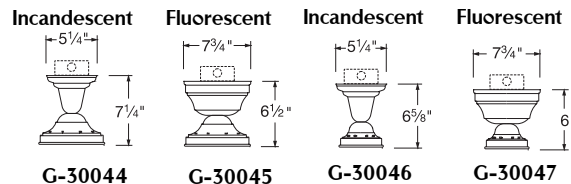

6" Fitter

4" Fitter

New York
6" Fitter
D

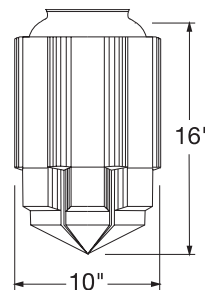

Lamping

Incandescent	Lumens	Lamp Base	Code	Pendants		Flush Mounted	
				6" Fitter	4" Fitter	6" Fitter	4" Fitter
1-100 A-19	1,650	Medium	A	•	•	•	•
1-150 A-21	2,169	Medium	B	•	•		
Fluorescent							
1 CFQ13	765	G24q-1 4 Pin	C	•	•	•	•
2 CFQ13	1,530	G24q-1 4 Pin	D	•	•	•	•
1 CFQ18	1,075	G24q-2 4 Pin	E	•	•	•	•
2 CFQ18	2,150	G24q-2 4 Pin	F	•	•	•	•
1 CFQ26	1,460	G24q-3 4 Pin	G	•	•	•	•
2 CFQ26	2,920	G24q-3 4 Pin	H	•	•	•	•
1 CFTR32	2,040	GX24q-3 4 Pin	I	•	•	•	•
2 CFTR32	4,080	GX24q-3 4 Pin	J	•	•	•	•
1 CFTR42	2,729	GX24q-4 4 Pin	K	•	•	•	•
2 CFTR42	5,458	GX24q-4 4 Pin	L	•	•	•	•

Please state voltage. See Code. Code: 1 120 volts *See page 3 for Low Wattage Metal Halide options
2 277 volts

Options

All ballasts are high power factor electronic.

Code

- 1 Integral Dimming Ballasts
- 2 Emergency Ballast, for fluorescent fixtures. Remotely mounted.
- 3 Damp Location (only available with painted or Brushed Aluminum finish.)
- 4 No Options Needed

Matching Sconce: Skyline Moderne


Finishes

Standard Painted Finishes	Code		Code
Satin Black	A	Light Bronze	G
Reflector White	B	Dark Bronze	H
Painted Aluminum	C	Painted Antique Brass	I
New Satin Nickel	D	Gray Granite	J
Faux Rust	E	Light Verdigris	K
Beige	F	Sungold	L
Standard Metallic Finishes			
Polished Brass	M	Antique Brass	O
Satin Brass	N	Brushed Aluminum	P
Premium Finishes (Check with factory for price & availability)			
Polished Nickel	Q	Satin Chrome	U
Satin Nickel	R	Flemish Brass	V
Antique Nickel	S	Polished Copper	W
Polished Chrome	T	Antique Copper	X
		Oil Rubbed Bronze	Y

How To Specify

To Specify a Chicago Pendant with 1-CFQ 26 Watt Compact Fluorescent Lamping, 277 volts, Satin Black Finish, Damp Location, 24" Overall Length:

G-30043-G2-C-A-3-024

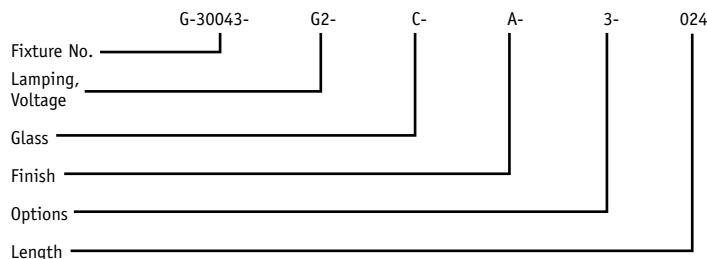

Contact factory for photometrics. These G Lighting products are Union made and E.T.L./C.S.A. listed. G Lighting reserves the right to modify existing designs to improve appearance or function.



9777 Reavis Park Drive St. Louis, MO 63123 314-631-6000 800-331-2425 314-631-7800 Fax

Low Wattage Metal Halide Now available in Schoolhouse & Moderne Pendants

- ❑ Available in 50W, 70W & 100W ED-17 Protected Multi-Vapor Metal Halide
- ❑ Available in pendants with a stem length of at least 1 foot
- ❑ Uses standard fluorescent ballast canopy
- ❑ Universal Voltage

WATTAGES	BASE	ANSI CODE	CODE	PENDANTS FITTER SIZE		FLUSH MTS FITTER SIZE	
				6"	4"	6"	4"
1 ED-17 50W	Medium	M110	U	*	*	Not available	
1 ED-17 70W	Medium	M98	V	*	*	Not available	
1 ED-17 100W	Medium	M90	W	*	*	Not available	

November 2005