



GL-2525

OXFORD




# OXFORD

Indoor Pendant

G Lighting  
Since 1908

9777 Reavis Park Drive  
St. Louis, MO, 63123  
800.331.2425 or 314.631.6000  
Fax 314.631.7800

sales@glighting.com www.glighting.com

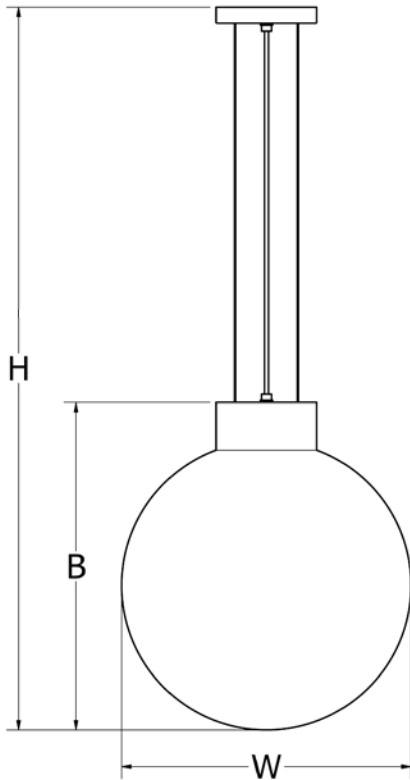

## GENERAL SPECIFICATION

**GU24:** Instant start self-ballasted lamp. GU24 base socket accepts any style or wattage GU24 lamp. 120v only.


**Lamping:** 2700K GU24 fluorescent lamp supplied at specified wattage.

**Acrylic:** Acrylic is UL-94 HB Flame Class rated.

**Cable Hung:** Comes with 72" cable and cord for on-site adjustability.

**Body:** Ring spun in 18ga steel or .050 aluminum.

**Finish:** Highly durable oven cured no VOC premium powder coat.

SAMPLE CATALOG NUMBER:						
GL-2525-		A-	W-	NSN-	1-	A- 042
MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	VOLTAGE	OVERALL HEIGHT
GL-2525 W in 18" mm 460 15lbs B in 20 1/2" mm 520 7kg H in 42" mm 1065	A. 1GU25DIM* B. 1GU26* C. 1GU32* D. 1GU42* E. 1CFQ26 F. 2CFQ26 G. 1CFTR26 H. 2CFTR26 I. 1CFTR32 J. 2CFTR32 K. 1CFTR42 L. 2CFTR42	Standard: W White Opal SW Satin White  Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat  Optional: Metallic Finishes Specify code from G-Lighting color chart  Specify code from G-Lighting color chart.	1. Cable 	A. No Options D. Dimming Compact fluorescent option only. DALI digital dimming available. See dimming chart.	Standard 42" overall height. Available up to 90".  For custom overall height, contact factory.

All Dimensions are nominal.  
\*Available in 120V only.

## Lamp Code Definition

Code	Fluorescent	Lamp Base	Incandescent Equivalent <sup>1</sup>	Rated Life Hrs <sup>1</sup>	Rated Lumens <sup>1</sup>	Kelvin	Code	Fluorescent	Lamp Base	Rated Life Hrs <sup>1</sup>	Rated Lumens <sup>1</sup>
GU25DIM <sup>2,3</sup>	GU24 25W	GU24	100W	8000	1750	2700	CFQ26	CFQ 26W	GX24q-3 4PIN	17000	1530
GU26	GU24 26W	GU24	100W	10000	1650	2700	CFT26	CFTR 26W	GX24q-3 4PIN	17000	1530
GU32	GU24 32W	GU24	120W	10000	2200	2700	CFT32	CFTR 32W	GX24q-3 4PIN	17000	2040
GU42	GU24 42W	GU24	150W	10000	2800	2700	CFT42	CFTR 42W	GX24q-4 4PIN	17000	2690

<sup>1</sup>Per MAXLITE lamp products catalog.

<sup>2</sup>Continuous dimming down to 30%.

<sup>3</sup>Works with incandescent dimming controls.