G Lighting
Fine Lighting Since 1908

GL-2212

SOUTHGATE

www.glighting.com
sales@glighting.com

SOUTHGATE

Indoor Pendant

G|Lighting Since 1908
9777 Reavis Park Drive
St. Louis, MO, 63123
800.331.2425 or 314.631.6000
Fax 314.631.7800
sales@glighting.com www.glighting.com

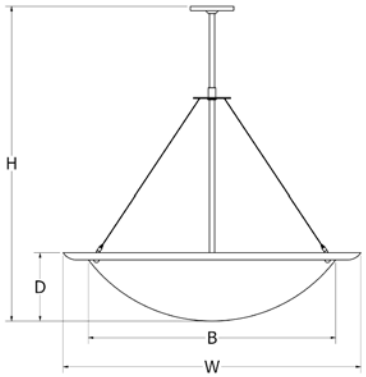

GENERAL SPECIFICATION

Canopy: Low profile. May be mounted on flat or sloped ceilings up to 40°.

GU24: Complies with Title 24. Fixture includes lamps. 120v only.

Lamping: Standard lamping packages offer long lamp life, high power factor energy efficient electronic ballast.

Body: GL-2210-2213 ring spun in 18ga steel or .050 aluminum. GL-2214-2215 ring spun in .080 aluminum.

Acrylic: Seamless acrylic is UL-94 HB Flame Class rated.

Modifications: Consult factory for lamping, cluster, or sizing options.

Finish: Highly durable oven cured no VOC premium powder coat.

SAMPLE CATALOG NUMBER:

GL-2212-	C-	W-	NSN-	1-	A-	038
MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT

MODEL NO.

GL-2210
14lbs 6 kg
B in 18" mm 460
W in 22 1/2" mm 570
D in 6 3/8" mm 160
H in 29" mm 740

GL-2211
21lbs 10 kg
B in 24" mm 610
W in 30" mm 760
D in 7 3/8" mm 190
H in 34" mm 865

GL-2212
29lbs 13kg
B in 30" mm 760
W in 36" mm 915
D in 8 3/8" mm 215
H in 38" mm 965

GL-2213
37lbs 17kg
B in 38" mm 965
W in 44" mm 1120
D in 10" mm 255
H in 42" mm 1070

GL-2214
52lbs 24kg
B in 45" mm 1145
W in 51" mm 1370
D in 11 7/8" mm 300
H in 46" mm 1170

GL-2215
67lbs 30kg
B in 55" mm 1380
W in 64" mm 1625
D in 15 3/8" mm 390
H in 50" mm 1270

LAMPING

A. 2CFT32
B. 2CFT42
C. 3GU18
D. 3GU25DIM
E. 3GU26
F. 3GU32
G. 3GU42
H. 4CFQ26
I. 4CFT26

C. 3GU18
D. 3GU25DIM
E. 3GU26
F. 3GU32
G. 3GU42
H. 4CFQ26
I. 4CFT26
J. 4CFT32
K. 4CFT42
L. 6GU18
M. 6GU26
N. 6CFQ26
O. 6CFT26
P. 6CFT32
Q. 6CFT42

C. 3GU18
D. 3GU25DIM
E. 3GU26
F. 3GU32
G. 3GU42
DD. 3CF39
H. 4CFQ26
I. 4CFT26
J. 4CFT32
K. 4CFT42
L. 6GU18
M. 6GU26
N. 6CFQ26
O. 6CFT26
P. 6CFT32
Q. 6CFT42

L. 6GU18
M. 6GU26
N. 6CFQ26
O. 6CFT26
P. 6CFT32
Q. 6CFT42
R. 6CF39
T. 6CF50
V. 8CFQ26
W. 8CFT26
X. 8CFT32
Y. 8CFT42
BB. 8CF55
CC. 9CF39
DD. 3CF39
EE. 4CF39

L. 6GU18
M. 6GU26
N. 6CFQ26
O. 6CFT26
P. 6CFT32
Q. 6CFT42
R. 6CF39
S. 6CF40
T. 6CF50
U. 6CF55
V. 8CFQ26
W. 8CFT26
X. 8CFT32
Y. 8CFT42
Z. 8CF40
AA. 8CF50
BB. 8CF55
CC. 9CF39

L. 6GU18
M. 6GU26
N. 6CFQ26
O. 6CFT26
P. 6CFT32
Q. 6CFT42
R. 6CF39
S. 6CF40
T. 6CF50
U. 6CF55
V. 8CFQ26
W. 8CFT26
X. 8CFT32
Y. 8CFT42
Z. 8CF40
AA. 8CF50
BB. 8CF55
CC. 9CF39

ACRYLIC

Standard:
W. White Opal

Optional:
S. Satin White
F. Faux Alabaster
M. Earth Marble
H. Hand Painted Alabaster

Acrylic is UL-94 HB Flame Class rated.

FINISH

Standard:
Powder Coat
Specify code from G-Lighting color chart

Optional:
Metallic Finishes
Specify code from G-Lighting color chart

45" available in Satin Aluminum and powder coat finish only

55" available in Satin Aluminum and powder coat finish only

HANGER

1. Stem

2. Cable

3. Arms

4. Stem Cluster

Custom lengths available. For heights longer than standard, additional length will be added to top stem.

OPTION(S)

A. No Options

F. Add Finial

B. Damp Location
Available in powder coat or Brushed Aluminum finish.

D. Dimming
See dimming chart.

E. Emergency Ballast
Operates one fluorescent lamp. Integral in 30" bowls or larger. All others remotely mounted. Specify voltage after code.

P. Perforated Top Lens

Multi-circuiting available upon request.

OVERALL HEIGHT

Standard overall height shown by model no.

For custom overall height, specify in inches.

Fixtures over 50 lbs require reinforced junction box
All dimensions are nominal.

Lamp Code Definition

Code	Fluorescent	Lamp Base	Incandescent Equivalent[1]	Rated Life Hrs[1]	Lumens[1]	Kelvin
GU18	GU24 18W	GU24	75W	10000	1250	2700
GU25DIM	GU24 25W	GU24	100W	8000	1750	2700
GU26	GU24 26W	GU24	100W	10000	1650	2700
GU32	GU24 32W	GU24	120W	10000	2200	2700
GU42	GU24 42W	GU24	150W	10000	2730	2700

Code	Fluorescent	Lamp Base	Rated Life Hrs[1]	Lumens[1]
CFQ26	CFQ 26W	GX24q-3 4PIN	17000	1530
CFT26	CFTR 26W	GX24q-3 4PIN	17000	1530
CFT32	CFTR 32W	GX24q-3 4PIN	17000	2040
CFT42	CFTR 42W	GX24q-4 4PIN	17000	2690
CF39	CF 36/39W	2G11 4PIN	12000	2510
CF40	CF 40W	2G11 4PIN	20000	2840
CF50	CF 50W	2G11 4PIN	14000	3400
CF55	CF 55W	2G11 4PIN	10000	4080

[1]Per MAXLTE & GE lamp products catalog
Contact factory for availability of other lamp configurations including induction and metal halide.

© Gross Chandelier Co.

G Lighting reserves the right to modify existing designs to improve appearance or function

G Lighting products are a union made.