



GL-2516

VOYAGER



VOYAGER



Indoor Pendant

GLighting
Since 1908

9777 Reavis Park Drive
St. Louis, MO, 63123
800.331.2425 or 314.631.6000
Fax 314.631.7800

sales@glighting.com www.glighting.com

Cluster Samples

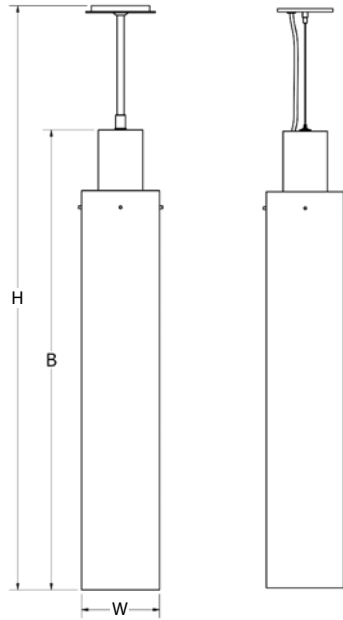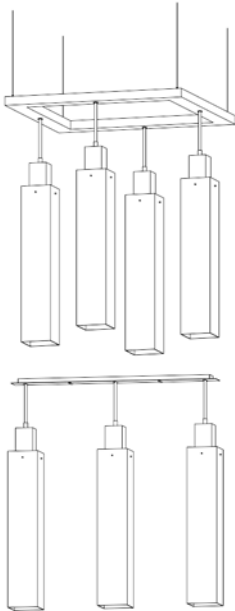

GENERAL SPECIFICATION

Canopy: Low profile. May be mounted on flat or sloped ceilings up to 40°. Available stem or field adjustable cord hung.

Ballast: T5 energy efficient integral electronic ballast. Universal voltage.

GU24: Instant start self-ballasted lamp. GU24 base socket accepts any style or wattage GU24 lamp. 120v only.

Lamping: T5 or T5HO offer high efficiency and long life. 2700K GU24 fluorescent lamp supplied at specified wattage.



Body: 1/8" aluminum body.

Acrylic: Acrylic is UL-94 HB Flame Class rated.

Modifications: Consult factory for lamping or cluster options.

Standard Finishes: Highly durable oven cured no VOC premium powder coat.

Cable Hung: Comes with 72" cable and cord for on-site adjustability.

SAMPLE CATALOG NUMBER:							
GL-2515-		B-	W-	NSN-	1-	A-	042
MODEL NO.	LAMPING	ACRYLIC	FINISH	HANGER	OPTION(S)	OVERALL HEIGHT	
GL-2515 12lbs 5.5kg	W in 7" mm 180 B in 32" mm 810 H in 42" mm 1065	A. 1GU25DIM* B. 1GU26* C. 1GU32* D. 1GU42* E. 1PAR3075*	Standard: W White Opal S Satin White Acrylic is UL-94 HB Flame Class rated.	Standard: Powder Coat Premium: SA Satin Aluminum Specify code from G-Lighting color chart.	1. Stem 	A. No Options E. Emergency Remote mount up to 5' from lamps Emergency option only available with T5 lamping D. Dimming See dimming chart	Standard overall height shown by model no. For custom overall height, specify in inches.
GL-2516 20lbs 9kg	W in 7" mm 180 B in 42" mm 1065 H in 52" mm 1320	E. 1PAR3075* F. 2T524HO			2. Cable 		
GL-2517 30lbs 13.5kg	W in 7" mm 180 B in 62" mm 1575 H in 72" mm 1830	G. 2T528 H. 2T554HO I. 2T528DL* J. 2T554HODL*			Emergency option not available with hanger 2.		

All dimensions are nominal.
*Available in 120V only.

Lamp Definition

Lamp	Fluorescent	Lamp Base	Incandescent Equivalent ¹	Rated Life Hrs ¹	Rated Lumens ¹	Rated Kelvin	Lamp	Halogen	Lamp Base	Rated Life Hrs ¹	Rated Lumens ¹
GU25DIM ^{2,3}	GU24 25W	GU24	100W	8000	1750	2700	PAR3075	1 PAR30 75W	Medium	3000	1030
GU26	GU24 26W	GU24	100W	10000	1650	2700	DL ⁴	1 PAR30 75W	Medium	3000	1030
GU32	GU24 32W	GU24	120W	10000	2200	2700					
GU42	GU24 42W	GU24	150W	10000	2730	2700					
T524HO	T5 24W	Mini-Bi-Pin		36000 ⁵	1840	3500					
T528	T5 28W	Mini Bi-Pin		36000 ⁵	2530	3500					
T554HO	T5 54W	Mini Bi-Pin		36000 ⁵	4600	3500					

¹Per MAXLITE & GE lamp products catalog
²Continuous dimming down to 30%.

³Works with incandescent dimming controls.
⁴Downlights are wired on separate circuit.

⁵12HR start

